

WATCH VIDEO




Code No.	<b>7923</b>	Model	<b>BMF-3160-CTZ</b>
O.D.	<b>φ31 mm</b>	Motor speed	<b>60,000 min<sup>-1</sup></b>
		Max. power	<b>350 w</b>
Spindle accuracy	<b>Within 1 μm</b>	Collet	<b>CHA Group (φ0.5-φ4.0 mm)</b>
		Cord min. bending radius	<b>60 mm</b>
		Net weight	<b>604 g</b>



Code No.	<b>7924</b>	Model	<b>BMF-3130-CTZ</b>
O.D.	<b>φ31 mm</b>	Motor speed	<b>30,000 min<sup>-1</sup></b>
		Max. power	<b>350 w</b>
Spindle accuracy	<b>Within 1 μm</b>	Collet	<b>CHA Group (φ0.5-φ4.0 mm)</b>
		Cord min. bending radius	<b>60 mm</b>
		Net weight	<b>659 g</b>



Code No.	<b>7925</b>	Model	<b>BM-3030RA</b>
O.D.	<b>φ30 mm</b>	Motor speed	<b>30,000 min<sup>-1</sup></b>
		Max. power	<b>350 w</b>
Spindle accuracy	<b>Within 1 μm</b>	Collet	<b>CHA Group (φ0.5-φ4.0 mm)</b>
		Cord min. bending radius	<b>60 mm</b>
		Net weight	<b>474 g</b>

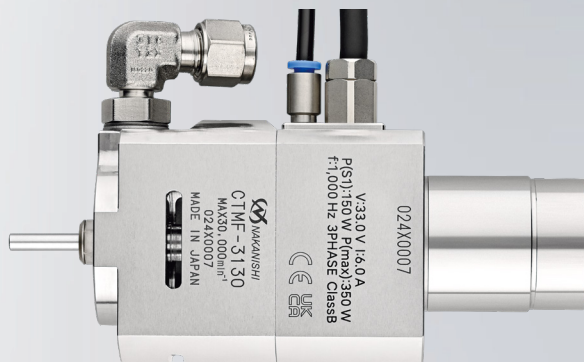


Code No.	<b>7926</b>	Model	<b>CTMF-3130</b>
O.D.	<b>φ31 mm</b>	Motor speed	<b>30,000 min<sup>-1</sup></b>
		Max. power	<b>350 w</b>
Spindle accuracy	<b>Within 1 μm</b>	Collet	<b>CHA Group AA (φ3.0 φ3.175 φ4.0 mm)</b>
		Cord min. bending radius	<b>60 mm</b>
		Net weight	<b>1,100 g</b>


# Accessories


Order by Code No.

\*Specifications and design are subject to change without notice.

Motor cord	Code No.	Model	Cord length	Standard accessories	Compatible model
 <p>Joint type</p>	<b>7931</b>	EMCD-3000i-3M	3 m	Air hose Connector cap (included)	BMF-3160-CTZ BMF-3130-CTZ BM-3030RA CTMF-3130
	<b>7932</b>	EMCD-3000i-5M	5 m		
	<b>7933</b>	EMCD-3000i-7M	7 m		

\*The minimum cord bending radius is 60 mm.


Collet	Code No.	Model	I.D.	Compatible model
 <p>φ1.0 and over</p> <p>φ0.5-φ0.9</p>	<b>91430</b>	CHA-3.0	φ3.0	BMF-3160-CTZ BMF-3130-CTZ BM-3030RA CTMF-3130 <i>*High precision type AA (Run-out accuracy within 2 μm)</i>
	<b>91440</b>	CHA-4.0	φ4.0	
	<b>91492</b>	CHA-2.35	φ2.35	
	<b>91493</b>	CHA-3.175	φ3.175	
	<b>91494</b>	CHA-3.0AA	φ3.0AA*	
	<b>91495</b>	CHA-4.0AA	φ4.0AA*	
<b>91496</b>	CHA-3.175AA	φ3.175AA*		
<b>914□□</b>	CHA-□□	φ0.5, φ0.6, φ0.7, φ0.8, φ0.9		
		φ1.0, φ1.5, φ2.0, φ2.5, φ3.5		
			φ1.1, φ1.2, φ1.3, φ1.4, φ1.6, φ1.7, φ1.8, φ1.9 φ2.1, φ2.2, φ2.3, φ2.4, φ2.6, φ2.7, φ2.8, φ2.9 φ3.1, φ3.2, φ3.3, φ3.4, φ3.6, φ3.7, φ3.8, φ3.9	

Collet nut	Code No.	Model	Compatible model
	<b>2102</b>	CHN-A	BMF-3160-CTZ BMF-3130-CTZ BM-3030RA
	<b>7798</b>	CHN-CTA-3.0	CTMF-3130
	<b>7799</b>	CHN-CTA-3.175	
	<b>7800</b>	CHN-CTA-4.0	

Bracket	Code No.	Model	Compatible model
—	<b>7943</b>	DL-Type brackets for securing the E3000i controller horizontally: 2 pcs.	E3000i Controller *Remove the rubber pad before fitting the brackets.

## Air line kit

Filtration: 0.3 μm




### ■ Air piping

Inlet: G1/4 male thread for connection hose  
Outlet: φ6.0 mm

### ■ Net weight: 1.9 kg

Code No.	4504	Model	AL-C1204
Standard accessories	Hose pipe (K-275): 2 m / Rubber pad: 4 pcs. Mounting screw (M6 × 20): 4 pcs. Washer: 4 pcs. / Hose band: 1 pc.		
Standard equipment	Air filter / Air regulator / Air pressure gauge ON-OFF valve		

## Grip ring



### ■ Net weight: 385 g

Code No.	1885	Model	GR-30
Standard accessories	Mounting bolt (M5 × 25L): 3 pcs.		
Compatible model	BM-3030RA		

## Control panel extension cord (4 m)



Code No.	7940	Model	E3000i-PEX4
Standard accessories	Assembled product (cord length: 4 m) Mounting screw (M3): 4 pcs. / Flange nut: 4 pcs.		